


Bias Tee

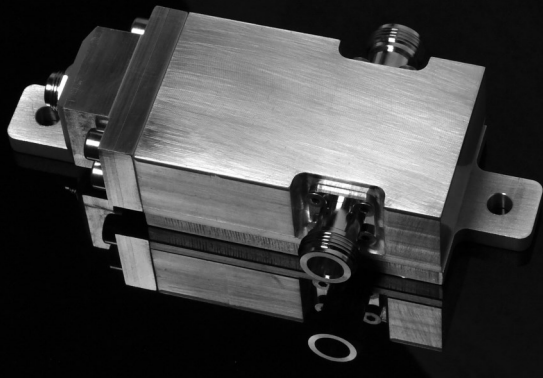

The Bias Tee is a DC Injector used with DC powered Pre Amplifiers or Cellular Repeaters where units are installed outdoors and AC power is not readily available. It can also be used for DC over Coax applications.

The Bias Tee is proudly manufactured in North America to the highest engineering and component standards providing the most reliable Bias Tee/DC Injector in its class.

- Bias Tee or DC Power Injector for cellular bands
- Frequency Range - 700 MHz to 2.5 GHz
- RF Connectors - 50 Ohm N Type, Female
- DC Connector - Waterproof barrel connector with retaining nut. IP68 rating.
- Maximum DC Input: 30 VDC
- Current Rating - 1A, 2A, 3A or 4A
- Can be used to power pre amplifiers and signal boosters
- For outdoor installations
- Enclosure Type: Waterproof IP68 housing
- IP68/NEMA sealed power plug/jack supplied
- Internal current limiter (open circuit if rating is exceeded). Will auto reset if current load is reduced.
- Operating temperature: -40°C to +55°C
- Unit Size - 5.63" x 1.92" x 1.25"
- 14.3 x 4.9 x 3.2 cm
- 1 Year Warranty

For more information:

XPANDAcell

Tel: 1-855-XPANDAcell Fax: 1-410-583-1704
International: 1-410-327-2306
sales@xpandacell.com www.xpandacell.com

©2017 Copyright 2017 XPANDAcell All rights reserved. XPANDAcell and the XPANDAcell logo are registered trademarks. All other trademarks are the property of their respective owners. Statements herein are based on normal operating conditions and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. XPANDAcell reserves the right to modify at any time without notice these statements, our services, products, and their warranty and performance specifications.